



LR65566

Tel: (450) 449-0412 ; 1-866-540-0412 Fax: (450)449-9115 ; 1-866-499-9115




E153598

## SÉRIES DO/DC/DL SERIES

2000 VA, # DE PIÈCE / PART # : D \_ 2000YZ

## SPÉCIFICATIONS ÉLECTRIQUES / ELECTRICAL SPECIFICATIONS

PHASE:	<input type="text" value="1"/>	TENSION / Y / PRIMARY PRIMAIRE VOLTAGE	TENSION / Z / SECONDARY SEC. VOLTAGE
FREQ.:	<input type="text" value="50/60 Hz."/>	<input type="checkbox"/> A = 12	<input type="checkbox"/> A = 12
	<input type="text" value="*60 Hz."/>	<input type="checkbox"/> B = 24	<input type="checkbox"/> B = 24
CLASSE ISOL. INSUL. CLASS	<input type="text" value="H(180°C)"/>	<input type="checkbox"/> C = 12/24	<input type="checkbox"/> C = 12/24
ELEV. TEMP. TEMP. RISE	<input "&lt;="" 120°c"="" type="text" value=""/>	<input type="checkbox"/> D = 16/32	<input type="checkbox"/> D = 16/32
		<input type="checkbox"/> E = 120	<input type="checkbox"/> E = 120
NIV. DE BRUIT SOUND LEVEL	<input "&lt;="" 40="" db."="" type="text" value=""/>	<input type="checkbox"/> F = 208	<input type="checkbox"/> F = 208
		<input type="checkbox"/> G = 240	<input type="checkbox"/> G = 240
		<input type="checkbox"/> H = 120/240	<input type="checkbox"/> H = 120/240
		<input type="checkbox"/> I = 277	<input type="checkbox"/> I = 277
		<input type="checkbox"/> J = 347	<input type="checkbox"/> J = 347
		<input type="checkbox"/> K = 380	<input type="checkbox"/> K = 380
		<input type="checkbox"/> L = 347/380	<input type="checkbox"/> L = 347/380
		<input type="checkbox"/> M = 416	<input type="checkbox"/> M = 416
		<input type="checkbox"/> N = 208/416	<input type="checkbox"/> N = 208/416
		<input type="checkbox"/> O = 480*	<input type="checkbox"/> O = 480*
		<input type="checkbox"/> P = 240/480	<input type="checkbox"/> P = 240/480
		<input type="checkbox"/> Q = 600*	<input type="checkbox"/> Q = 600*
		<input type="checkbox"/> S = _____	<input type="checkbox"/> S = _____
		<input type="checkbox"/> U = 480/600*	<input type="checkbox"/> U = 480/600*

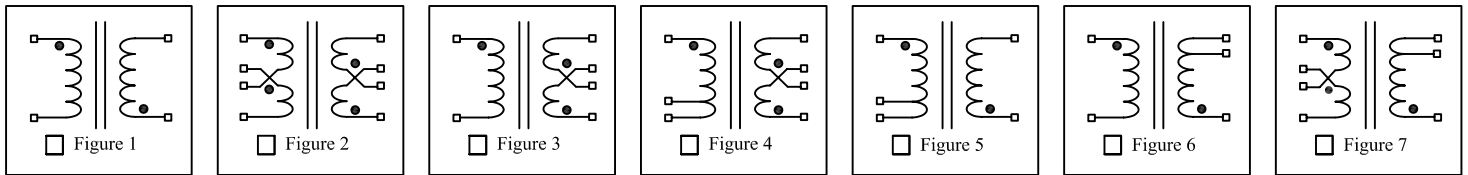

## SPÉCIFICATIONS MÉCANIQUES / MECHANICAL SPECIFICATIONS: ( dimensions = pouces/Inches).

<p><b>SERIE/SERIES DO</b></p> <p>TYPE OUVERT/OPEN TYPE BORNE À VIS / SCREW LUG</p> <p>Poids / Weight : 18.3 Kg ( 40.4 lbs )</p>	<p><b>SERIE/SERIES DL</b></p> <p>TYPE OUVERT/OPEN TYPE FILS DE SORTIE 10" LEAD WIRE LENGTH</p> <p>Poids / Weight : 18.3 Kg ( 40.4 lbs )</p>	<p><b>SERIE/SERIES DC</b></p> <p>VUE DE DESSOUS / BOTTOM VIEW TYPE FERMÉ / CLOSED TYPE</p> <p>Poids / Weight : 21.3 Kg ( 47.1 lbs )</p>
---	---	---

Toutes les dimensions sont approximatives. Spécifications peuvent changer sans préavis.  
All dimensions and weights are approximate. Specifications may change without notice.

**TRANSFAB** **TMS**  
magnetic solutions

NUMÉRO DE MODÈLE:  
MODEL NUMBER:  
D \_ 2000 \_ \_

ZONE	REV	REVISION	DESCRIPTION	DATE	APPROVAL APPROB.	Dessiné par: Drawn by: SS	DWG NO. 71CUDO/DC/DL2000	REV 05
DATE: FEBRUARY/25/08						PAGE: 1 de 1		