



LR65566

Tel: (450) 449-0412 ; 1-866-540-0412 Fax: (450)449-9115 ; 1-866-499-9115




E153598

SÉRIES DO/DC/DL SERIES

6000 VA, # DE PIÈCE / PART # : D _ 6000YZ

SPÉCIFICATIONS ÉLECTRIQUES / ELECTRICAL SPECIFICATIONS

PHASE:	<input type="text" value="1"/>	TENSION / Y / PRIMARY PRIMAIRE VOLTAGE	<input type="checkbox"/> A = 12	<input type="checkbox"/> J = 347	TENSION / Z / SECONDARY SEC. VOLTAGE	<input type="checkbox"/> A = 12	<input type="checkbox"/> J = 347
FREQ.:	<input type="text" value="50/60 Hz."/>		<input type="checkbox"/> B = 24	<input type="checkbox"/> K = 380		<input type="checkbox"/> B = 24	<input type="checkbox"/> K = 380
	<input type="text" value="*60 Hz."/>		<input type="checkbox"/> C = 12/24	<input type="checkbox"/> L = 347/380		<input type="checkbox"/> C = 12/24	<input type="checkbox"/> L = 347/380
CLASSE ISOL. INSUL. CLASS	<input type="text" value="H(180°C)"/>		<input type="checkbox"/> D = 16/32	<input type="checkbox"/> M = 416		<input type="checkbox"/> D = 16/32	<input type="checkbox"/> M = 416
ELEV. TEMP. TEMP. RISE	<input "<="" 120°c"="" type="text" value=""/>		<input type="checkbox"/> E = 120	<input type="checkbox"/> N = 208/416		<input type="checkbox"/> E = 120	<input type="checkbox"/> N = 208/416
			<input type="checkbox"/> F = 208	<input type="checkbox"/> O = 480*		<input type="checkbox"/> F = 208	<input type="checkbox"/> O = 480*
NIV. DE BRUIT SOUND LEVEL	<input "<="" 40="" db."="" type="text" value=""/>		<input type="checkbox"/> G = 240	<input type="checkbox"/> P = 240/480		<input type="checkbox"/> G = 240	<input type="checkbox"/> P = 240/480
			<input type="checkbox"/> H = 120/240	<input type="checkbox"/> Q = 600*		<input type="checkbox"/> H = 120/240	<input type="checkbox"/> Q = 600*
			<input type="checkbox"/> I = 277	<input type="checkbox"/> S = _____		<input type="checkbox"/> I = 277	<input type="checkbox"/> S = _____
			<input type="checkbox"/> U = 480/600*			<input type="checkbox"/> U = 480/600*	

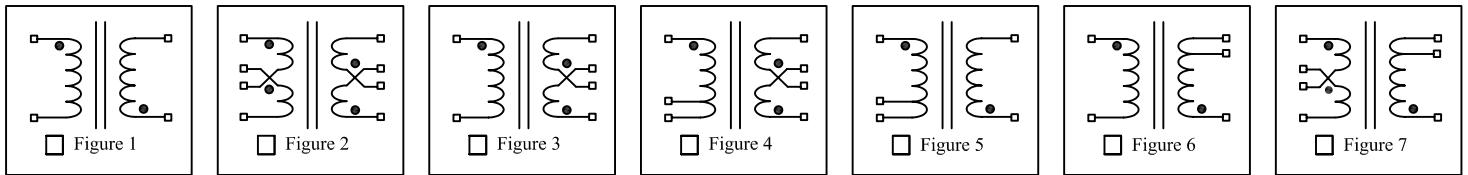

SPÉCIFICATIONS MÉCANIQUES / MECHANICAL SPECIFICATIONS: (dimensions = pouces/Inches).

<p>SERIE/SERIES DO</p> <p>TYPE OUVERT/OPEN TYPE BORNE À VIS / SCREW LUG</p> <p>Poids / Weight : 51.1 Kg (113 lbs)</p>	<p>SERIE/SERIES DL</p> <p>TYPE OUVERT/OPEN TYPE FILS DE SORTIE 10" LEAD WIRE LENGTH</p> <p>Poids / Weight : 51.1 Kg (113 lbs)</p>	<p>SERIE/SERIES DC</p> <p>VUE DE DESSOUS / BOTTOM VIEW TYPE FERMÉ / CLOSED TYPE</p> <p>Poids / Weight : 52.0 Kg (115 lbs)</p>
--	--	--

Toutes les dimensions sont approximatives. Spécifications peuvent changer sans préavis.
All dimensions and weights are approximate. Specifications may change without notice.

TRANSFAB **TMS**
magnetic solutions

NUMÉRO DE MODÈLE:
MODEL NUMBER:
D _ 6000 _ _

ZONE	REV	REVISION	DESCRIPTION	DATE	APPROVAL APPROB.	Dessiné par: Drawn by: SS	DWG NO. 71CUDO/DC/DL6000	REV 04
DATE: FEBRUARY/25/08						PAGE: 1 de 1		